

EDGEmaster® Wall (Dormer) Flashing

Wall (Dormer) Flashing is designed to prevent the entry of water into the wall. Wall flashing is typically found at interruptions in the wall, such as windows or door openings from water infiltration. Works great to prevent top edge of window or door openings from water infiltration. Available in open angle and regular and in a variety of sizes and colors.

Product Data and Ordering Information

Material: .012 min thickness, G30 galvanized
 Dimensions: 4" X 4" leg
 Part Number: WF120 Open Angle
 WF90 90° Angle

Length	Pieces Per Bundle	Bundles Per Pallet	Feet Per Bundle
10"	10	44	100

All Phillips products are made in the U.S.A.

ASTM and Code Standards

Phillips Roofing Metals meets or exceeds:

- ASTM A 653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- SMACNA Residential Sheet Metal Guidelines 2001

SDS and other technical information available at www.phillipsmfg.com.

Leed Credits for Recycled Content



MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%
 Post-consumer recycled content: 25%
 Pre-consumer recycled content: 5%


Storage

Avoid bending or other damage and store in a dry place protected from moisture.

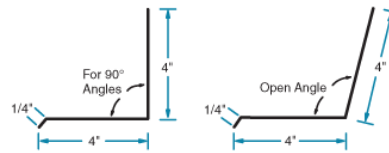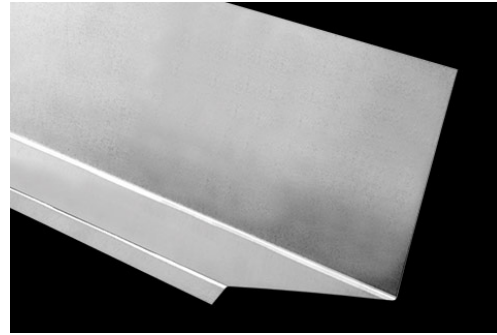

Drawings not to scale

COLOR GUIDE

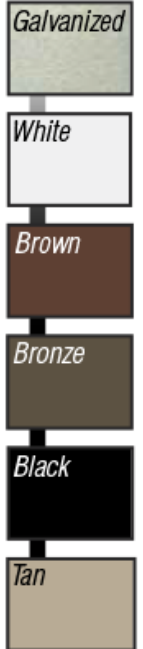

Actual colors may vary